

AUDIO FREQUENCY POWER AMPLIFIER  
LOW SPEED SWITCHING


#### FEATURES

- Complementary to KTD882.

#### MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		$V_{CBO}$	-40	V
Collector-Emitter Voltage		$V_{CEO}$	-30	V
Emitter-Base Voltage		$V_{EBO}$	-5	V
Collector Current	DC	$I_C$	-3	A
	Pulse (Note)		-7	
Base Current (DC)		$I_B$	-0.6	A
Collector Power Dissipation	Ta=25°C	$P_C$	1.5	W
	Tc=25°C		10	
Junction Temperature		$T_j$	150	°C
Storage Temperature Range		$T_{stg}$	-55 ~ 150	°C

Note : Pulse Width  $\leq 10\text{ms}$ , Duty Cycle  $\leq 50\%$ .

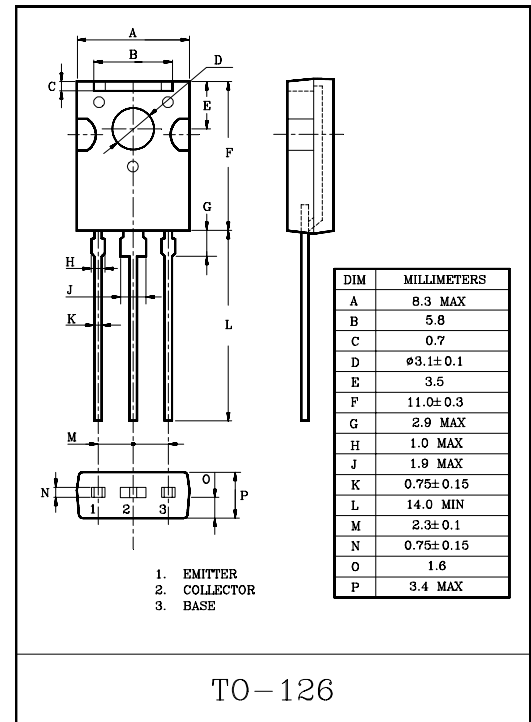


#### ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB} = -30V, I_E = 0$	-	-	-1	$\mu A$
Emitter-Cut-off Current	$I_{EBO}$	$V_{EB} = -3V, I_C = 0$	-	-	-1	$\mu A$
DC Current Gain *	$h_{FE}(1)$	$V_{CE} = -2V, I_C = -20mA$	30	220	-	
	$h_{FE}(2)$ (Note)	$V_{CE} = -2V, I_C = -1A$	100	160	400	
Collector-Emitter Saturation Voltage *	$V_{CE(sat)}$	$I_C = -2A, I_B = -0.2A$	-	-0.3	-0.5	V
Base-Emitter Saturation Voltage *	$V_{BE(sat)}$	$I_C = -2V, I_B = -0.2A$	-	-1.0	-2.0	V
Current Gain Bandwidth Product	$f_T$	$V_{CE} = -5V, I_C = -0.1A$	-	80	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB} = -10V, I_E = 0, f = 1MHz$	-	55	-	pF


\* Pulse Test : Pulse Width  $\leq 350\mu S$ , Duty Cycle  $\leq 2\%$  Pulsed

Note:  $h_{FE}(2)$  Classification O:100~200, Y:160~320, GR:200~400


$I_C - V_{CE}$

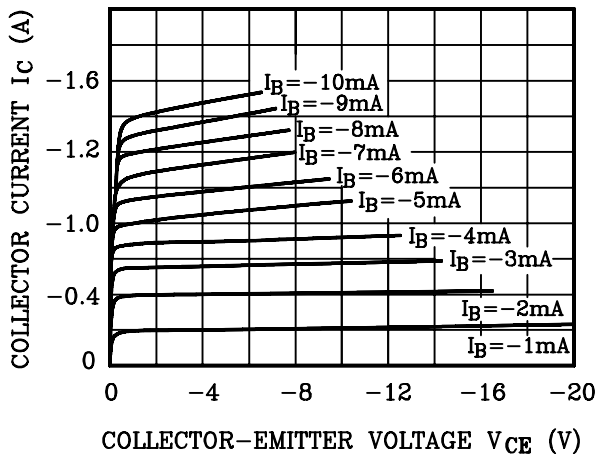


$h_{FE} - I_C$

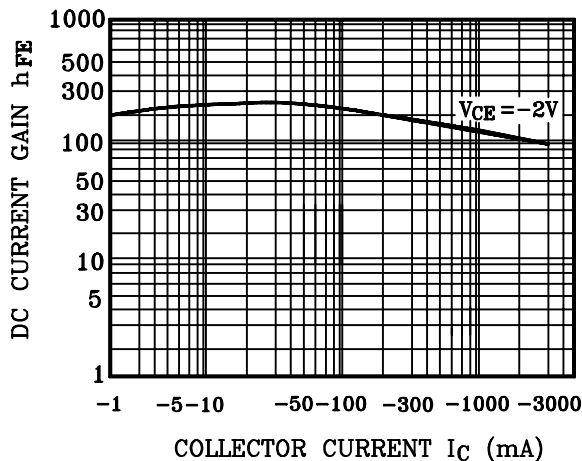


$V_{CE(sat)}, V_{BE(sat)} - I_C$

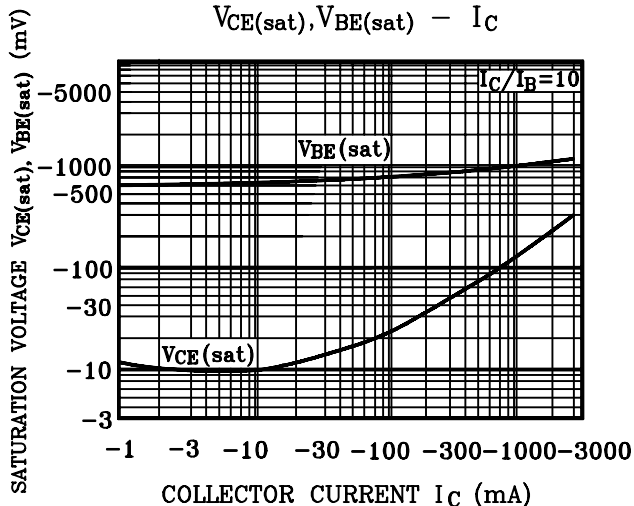


$f_T - I_C$

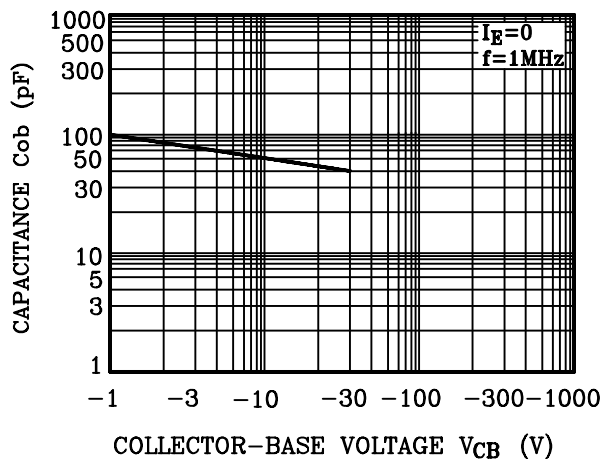

$f_T - I_C$

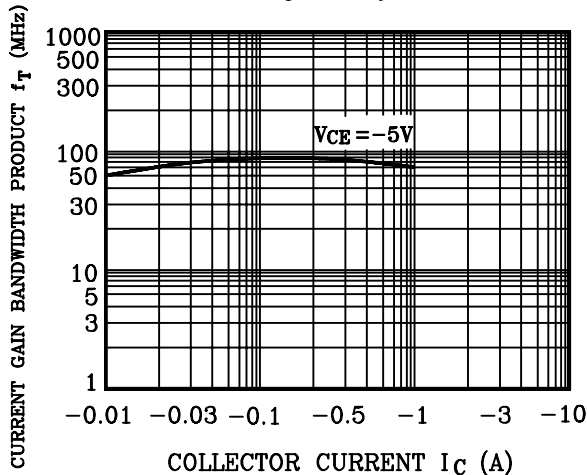

SAFE OPERATING AREA

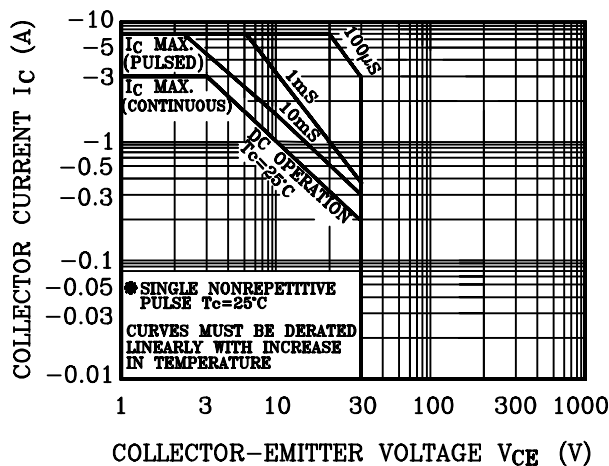

# KTB772

