

RF-130CH



Precious metal-brush motors

OUTPUT : 0.03W~2.5W (APPROX)




WEIGHT : 18g (APPROX)

Typical Applications Audio and Visual Equipment : CD Player / DVD Player

| MODEL | VOLTAGE | | NO LOAD | | AT MAXIMUM EFFICIENCY | | | | STALL | | | |
|----------------|-----------------|---------------|----------------|--------------|-----------------------|--------------|----------------|----------------|-------------|----------------|----------------|--------------|
| | OPERATING RANGE | NOMINAL | SPEED r/min | CURRENT A | SPEED r/min | CURRENT A | TORQUE mN-m | TORQUE g-cm | OUTPUT W | TORQUE mN-m | TORQUE g-cm | CURRENT A |
| RF-130CH-12250 | 2.0~7.5 | 6V CONSTANT | 8100 | 0.036 | 6600 | 0.16 | 0.76 | 7.8 | 0.53 | 4.12 | 42 | 0.70 |
| RF-130CH-2860 | (*) 1.0~1.5 | 1.2V CONSTANT | 7300 | 0.13 | 5990 | 0.60 | 0.68 | 7.0 | 0.43 | 3.82 | 39 | 2.74 |

(*) CW shifted commutation (CW+)

DIRECTION OF ROTATION

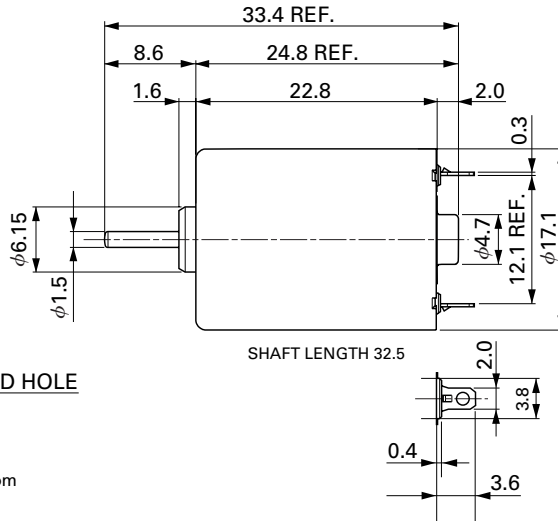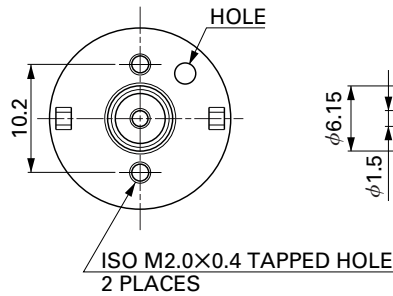


Usable machine screw length 1.2 max. from motor mounting surface.

UNIT: MILLIMETERS

RF-130CH-12250

6.0V

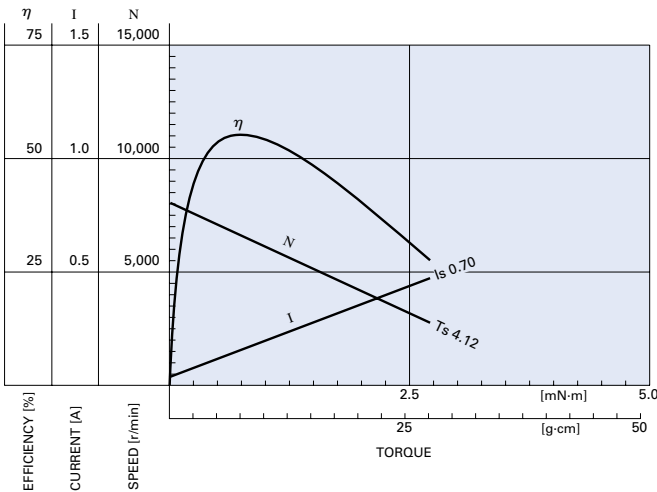

RF-130CH-2860

1.2V

